



SJ135 • Traveling Shaft Type (축승강형)


상방향형 Upright Traveling

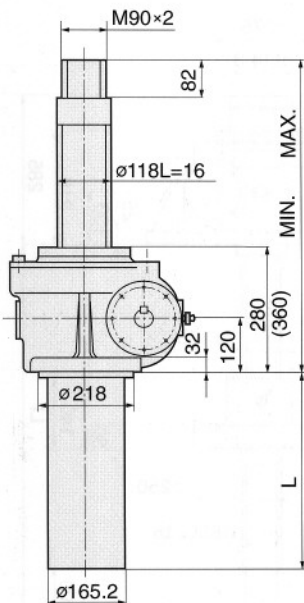

보호카바 Dustproof Bellow

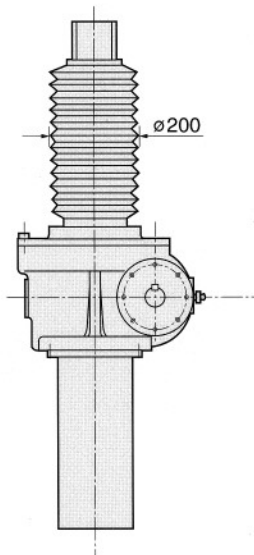


하방향형 Inverted Traveling

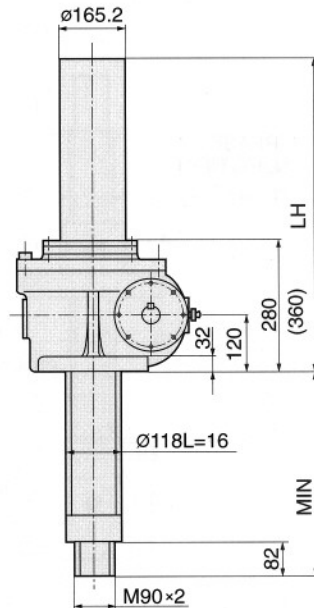


() : 회전방지키 설치시

평면도 Plane Figure

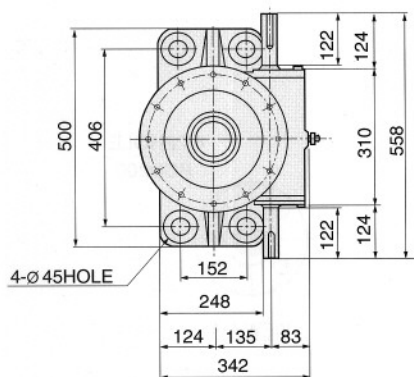


Dimension of Screw Nut

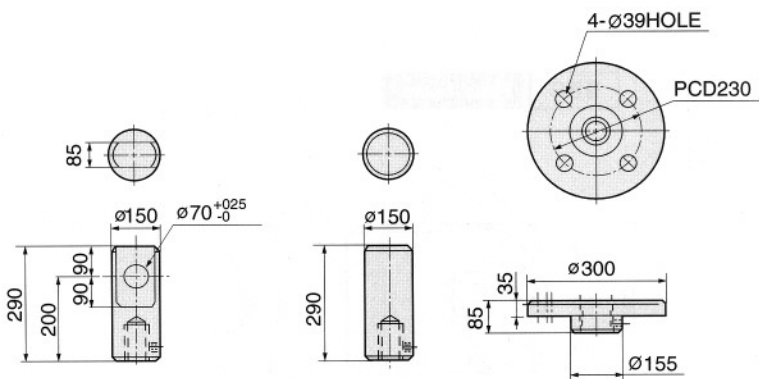

크레비스 너트 Clevis Nut

플레인 너트 Plain Nut

플렌지 너트 Flange Nut



SJ135 Screw Jack

STROKE NO	U 상방향형 (Upright Type)												I 하방향형 (Inverted Type)											
	N 회전방지키없음 (Prevent key Not Included)						k 회전방지키있음 (Prevent key Provided)						N 회전방지키없음 (Prevent key Not Included)						k 회전방지키있음 (Prevent key Provided)					
	N축보호카바없음 N: No Dustproof Cover			B축보호카바부착 B: Dustproof Cover			N축보호카바없음 N: No Dustproof Cover			B축보호카바부착 B: Dustproof Cover			N축보호카바없음 N: No Dustproof Cover			B축보호카바부착 B: Dustproof Cover			N축보호카바없음 N: No Dustproof Cover			B축보호카바부착 B: Dustproof Cover		
	MIN	MAX	L	MIN	MAX	L	MIN	MAX	L	MIN	MAX	L	MIN	MAX	LH	MIN	MAX	LH	MIN	MAX	LH	MIN	MAX	LH
	100	370	470	200	425	525	200	450	550	200	505	605	200	90	190	480	145	245	480	90	190	560	145	245
200	370	570	300	425	625	300	450	650	300	505	705	300	90	290	580	145	345	580	90	290	660	145	345	660
300	370	670	400	460	760	400	450	750	400	540	840	400	90	390	680	180	480	680	90	390	760	180	480	760
400	370	770	500	460	860	500	450	850	500	540	940	500	90	490	780	180	580	780	90	490	860	180	580	860
500	370	870	600	460	960	600	450	950	600	540	1040	600	90	590	880	180	680	880	90	590	960	180	680	960
600	370	970	700	500	1100	700	450	1050	900	580	1180	700	90	690	980	220	820	980	90	690	1060	220	820	1060
800	370	1170	900	500	1300	900	450	1250	1100	580	1380	900	90	890	1180	220	1020	1180	90	890	1260	220	1020	1260